



Popoto B-6S-77Li Battery


Product Overview:

The Popoto B-6S-77Li is a 77 Watt hour Lithium Ion 22.2 volt battery. This battery is sized for inclusion in the Popoto housings, and can power the PMM3511 as well as the PMM5021 based products, enclosed, deckbox and OEM variants.

This battery is UN 38.3 compliant, and can be shipped by air. When used with the LI-BE-5 battery aggregator multiple batteries can be safely combined to increase power capacity.

Features:

- UN38.3 Compliance
- 77 Watt Hour capacity
- 22.2 Volts (nominal)
- 3.5 Amp Hours

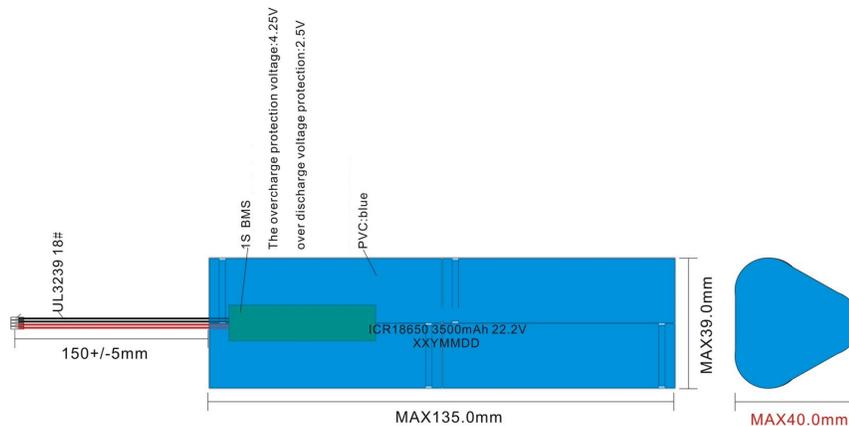

\$185





Specifications	
Nominal Capacity	Minimum: 3325mAh Typical: 3500mAh
Nominal Voltage	22.2V
Charging Cut-off Voltage	25.2V
Discharge Cut-off Voltage	15.9V
Standard Charge	Constant Current 0.2C Constant Voltage 25.2V 0.01C cut-off
Maximum Constant Current Charge	1750mA
Standard Discharge	Discharge at 0.2C to 15.9V
Maximum Continuous Discharge	2500mA
Operating Temperature	Charge 0C to 45 C Discharge -20C to 60C
Mass	315g

